


Accessories

Accessories to maximize the effectiveness and safety of the valve.

Discharge Blow-Through Adapter

Used to introduce metered product from the airlock into a pneumatic airstream. Stainless Steel construction available in diameters 2 $\frac{3}{8}$ "-6".

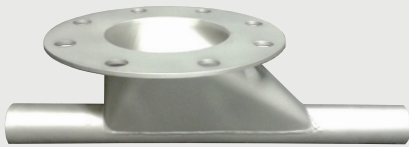

Tube diameter	MODEL			
	MD 150	MD 200	MD 250	MD 300
in.				
2 $\frac{3}{8}$	X			
3.0	X			
3.5	X	X		
4.0		X	X	
4 $\frac{1}{4}$		X	X	
4.5			X	X
5.5				X
6.0				X


Insulation Boxes

Insulation boxes are available for applications requiring operation in extreme heat or cold conditions.



Replacement Gaskets in EPDM & Silicone

Factory precision cut gasketing is available in EPDM or Silicone.

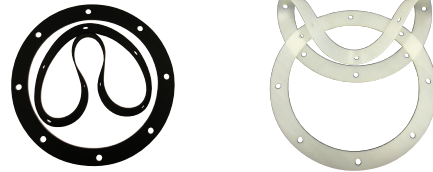


Special Sanitary designs

Quick-clean valve housing design options - MD & HTS only.




Speed Sensors

Detects rotor RPM for speed control.

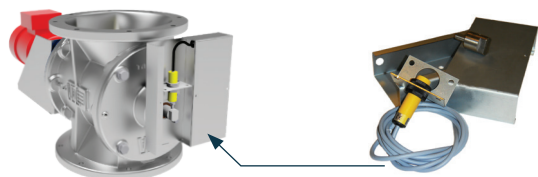

Capacity Limiter with Polyurethane Blade

Prevents the overfilling of the rotor chamber. Helps prevent product damage.



Air Purge Seal Kit

Creates an overpressure which keeps abrasive powders out of bearings & seals.

